

G-Finn Combo Roof Mount Antenna

G-Com International Ltd


44 Rumer Hill Road
Cannock, Staffs. WS11 3EX. UK

Tel: +44 (0) 1543 570217
Fax: +44 (0) 1543 570660

e-mail: martin@g-com.co.uk
www.g-com.co.uk



The Combo Range of Antennas G4C, G5M & G-Finn all have the capability to be GSM only, GPS only or a Combo Antenna.

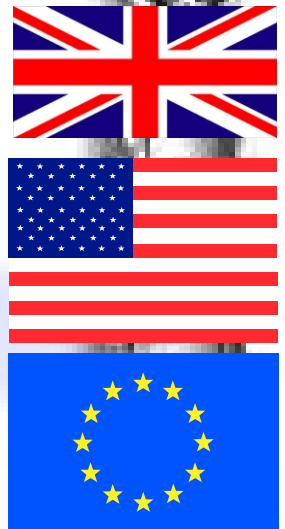

Vehicle and Asset Tracking Antenna

GPS

Centre Frequency:	1575.42 MHz
Bandwidth:	2 MHz
Polarisation:	Right Hand Circular
Output VSWR:	1:1.5 Max
Output Impedance:	50 ohm
Gain:	30 db typically or low gain is available
Supply Voltage:	3.2 - 5.0 V DC
Current Consumption:	9mA +/-3mA
Cable:	4m RG174/U (Other Lengths Available)
Connector:	FME or SMA (Others available)

GSM / PCN

Frequency:	700 - 2300 MHz (Quad Band)
VSWR:	1:1.5 Max
Impedance:	50 ohm
Gain:	3dbi typically
Cable:	4m RG174/U
Connector:	FME or TNC (Others available)

Mechanical

Dimensions : 35mm Highest x 76mm Long
50mm Widest Point

M12 Nut & Thread

Specifications

G-Com
Maintaining the link